


- Using CMOS IC, high reliability and stability
- Fixed time 0.1sec~100hrs can depend on user requirement
- High repeat accuracy $\pm 1\%$
- Two LED'S provides status indication for power ON and time UP
- Short resetting time 100ms max


SPECIFICATIONS

FULL TIME RANGE		On delay time 0.1S~100H can depend on user requirement.					
RATED VOLTAGE		DC(V):12, 24, 48, 110 AC(V):12, 24, 48, 110, 220, 240, 380, 415, 440 50/60Hz					
INDICATOR OPERATING		ON-UP Two indicator lamp					
o/p C O N T A C T	MODEL	CF3-1	CF3-2	CF3-3	CF3-S1	CF3-S2	CF3-S3
	TIME LIMIT 1C	5A		5A	5A		5A
	TIME LIMIT 2C		5A			5A	
	INSTANTANEOUS 1C			5A			5A
L I F E	MECHANICAL	5×10^6 times					
	ELECTRICAL	10^5 times					
RESET TIME		0.1 sec max					
CONSUMED POWER		2VA					
AMBIENT TEMPERATURE		$-10^{\circ}\text{C} \sim +55^{\circ}\text{C}$					
AMBIENT HUMIDITY		45~85%RH					
WEIGHT		Approx. 140g			Approx. 145g		

CONNECTION DIAGRAMS & TIMING CHARTS

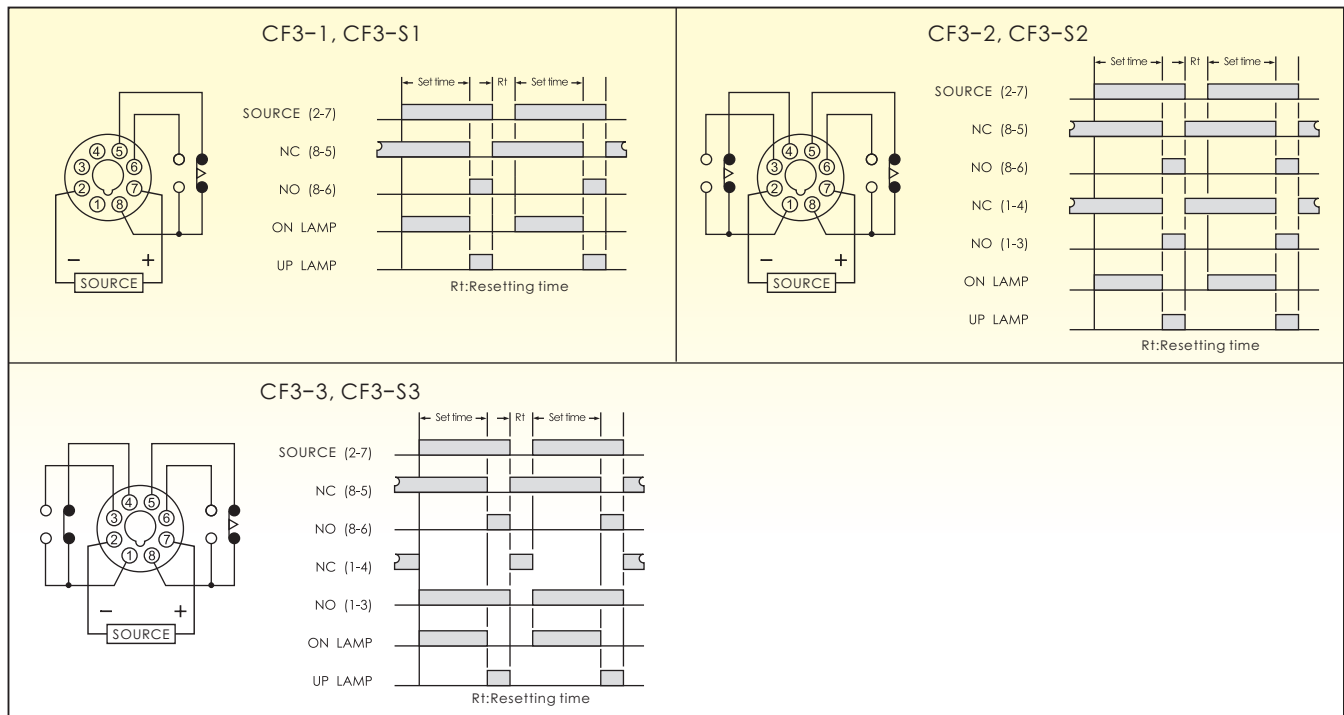

DIMENSIONS

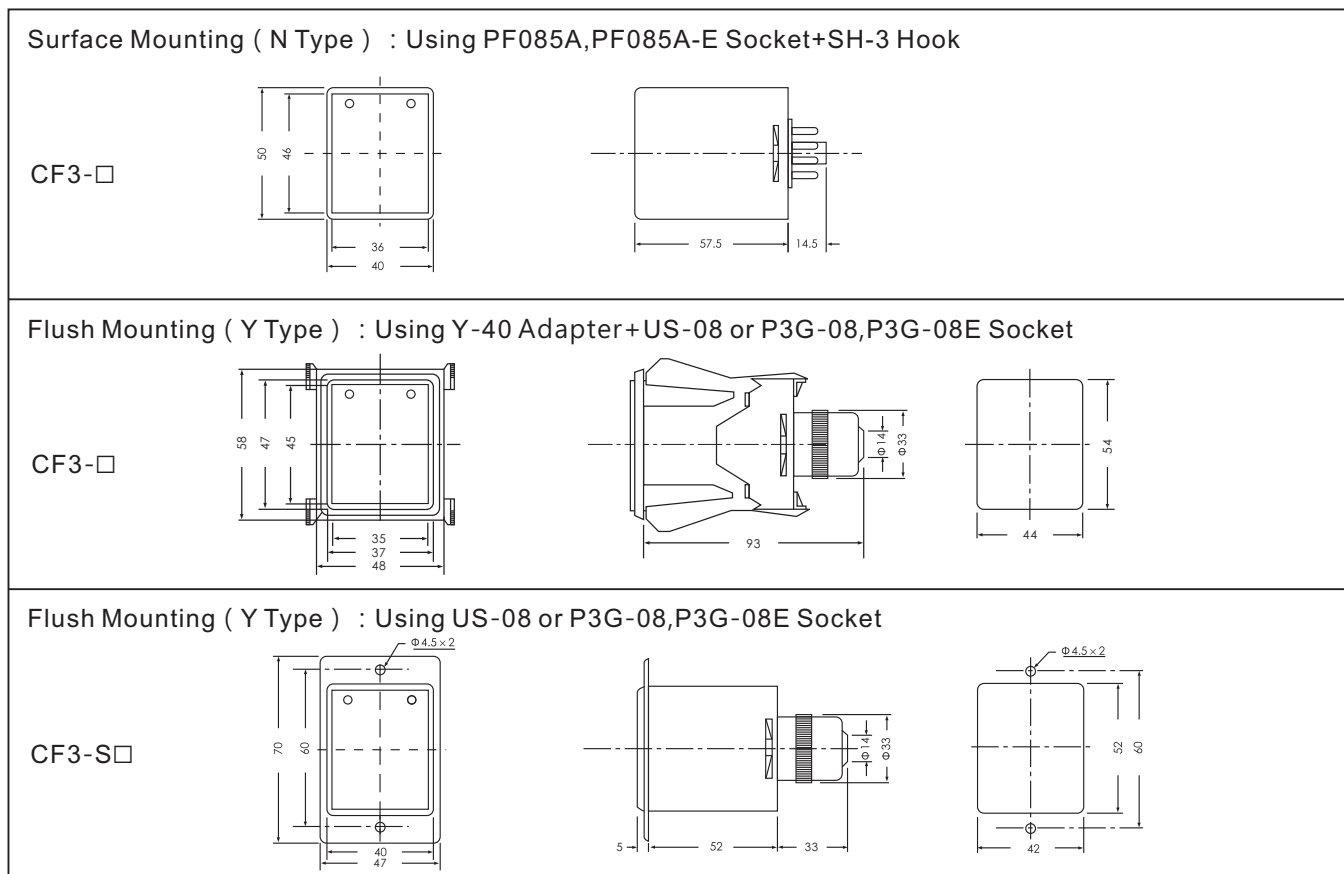

ANV ANV ANV ELECTRIC CO., LTD.

Kaohsiung Headquarter
 No. 151, Jin Shan Road, Kaohsiung, Taiwan
 Tel :+886 7 359 5833 Fax :+886 7 359 5822
 E-Mail : anv@anv.com.tw

Taipei Office
 No. 166, Fu Xing 3rd Street, Taishan Dist.,
 New Taipei City, Taiwan
 Tel :+886 2 2296 3133 Fax :+886 2 2296 3233
 E-Mail : taipei@anv.com.tw

Tainan Office
 No. 60, Lin Sen Road Sec. 1, Tainan, Taiwan
 Tel:+886 6 216 0988 Fax:+886 6 216 0388
 E-Mail : tainan@anv.com.tw

ANV ELECTRIC (HK) LTD
 Flat 4, 14/F., Block 4, Wai Wah Centre,
 Shatin, N.T., Hong Kong
 Tel :+852 2690 2588 Fax :+852 2690 2511
 E-Mail : anv@anv.com.hk

Taichung Office
 No. 532, Wen Hsin Road Sec. 1, Taichung, Taiwan
 Tel :+886 4 2320 9930 Fax :+886 4 2320 9960
 E-Mail : taichung@anv.com.tw

ANV ELECTRIC (M) SDN. BHD
 25-1, Jalan 1/116B, Kuchai Entrepreneur's Park,
 Off Jalan Kuchai Lama, 58200 Kuala Lumpur, Malaysia
 Tel :+60 3 7980 3328 Fax :+60 3 7980 3779
 E-Mail : anv@anv.com.my