


AH2-N□, AH2-NV□
AH2-Y□, AH2-YV□


- Using CMOS IC, high reliability and stability
- Large transparent for easy adjustment and monitor
- 7 timing series available (A, B, C, D, E, F, G), from 1sec to 100hrs
- Offered in a wide range of AC or DC operating voltage
- Wide operating voltage AC/DC 24~240V (AH2-NV□, AH2-YV□)
- Output contact 2C delay or 1C delay with 1C instantaneous can select by pushing "MODE" switch to A or B
- Two LED'S provides status indication for power ON and time UP


SPECIFICATIONS

MOUNTING		Surface(-N)	Flush(-Y)	Surface(-N)	Flush(-Y)
FULL TIME RANGE		A: 1S, 10S, 1M, 10M B: 3S, 30S, 3M, 30M C: 6S, 60S, 6M, 60M D: 1M, 10M, 1H, 10H		E: 3M, 30M, 3H, 30H F: 6M, 60M, 6H, 60H G: 10M, 100M, 10H, 100H	
MODEL		AH2-N□	AH2-Y□	AH2-NV□	AH2-YV□
RATED VOLTAGE		DC (V): 12, 24, 48, 110 AC (V): 12, 24, 48, 110, 220, 240, 380, 415, 440 50/60Hz		AC/DC 24~240V 50/60Hz	
INDICATOR OPERATING		ON-UP Two indicator lamp			
o/p C O N T A C T	MODE	mode A	mode B	mode A	mode B
	TIME LIMIT 1C		5A 250VAC Resistive Load		5A 250VAC Resistive Load
	TIME LIMIT 2C	5A 250VAC Resistive Load		5A 250VAC Resistive Load	
	INSTANTANEOUS 1C		5A 250VAC Resistive Load		5A 250VAC Resistive Load
L I F E	MECHANICAL	5×10 ⁶ times			
	ELECTRICAL	10 ⁵ times			
RESET TIME		0.1 sec max			
CONSUMED POWER		2VA			
AMBIENT TEMPERATURE		-10°C~+55°C			
AMBIENT HUMIDITY		45~85%RH			
WEIGHT		Approx. 200g		Approx. 130g	

CONNECTION DIAGRAMS & TIMING CHARTS

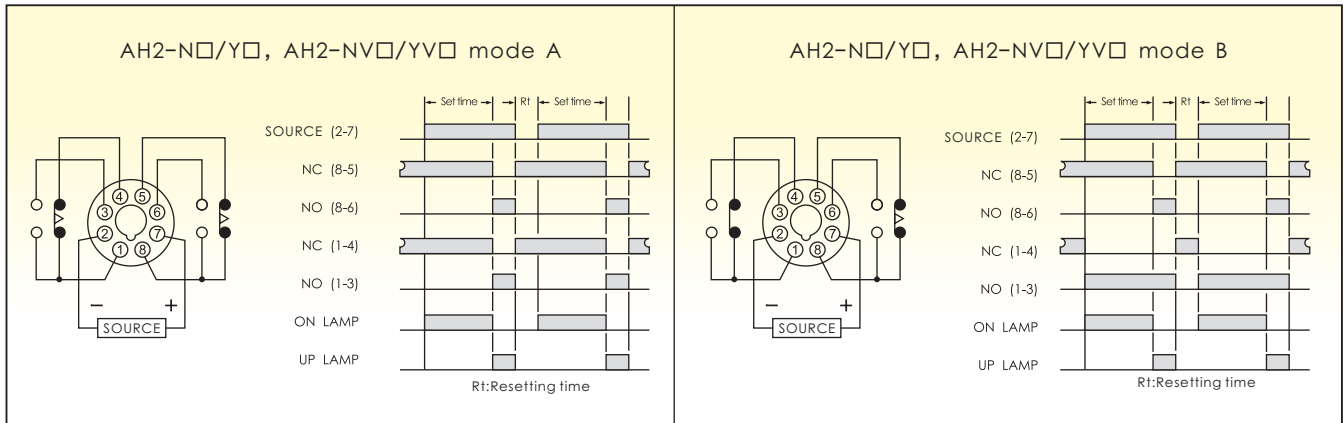

DIMENSIONS

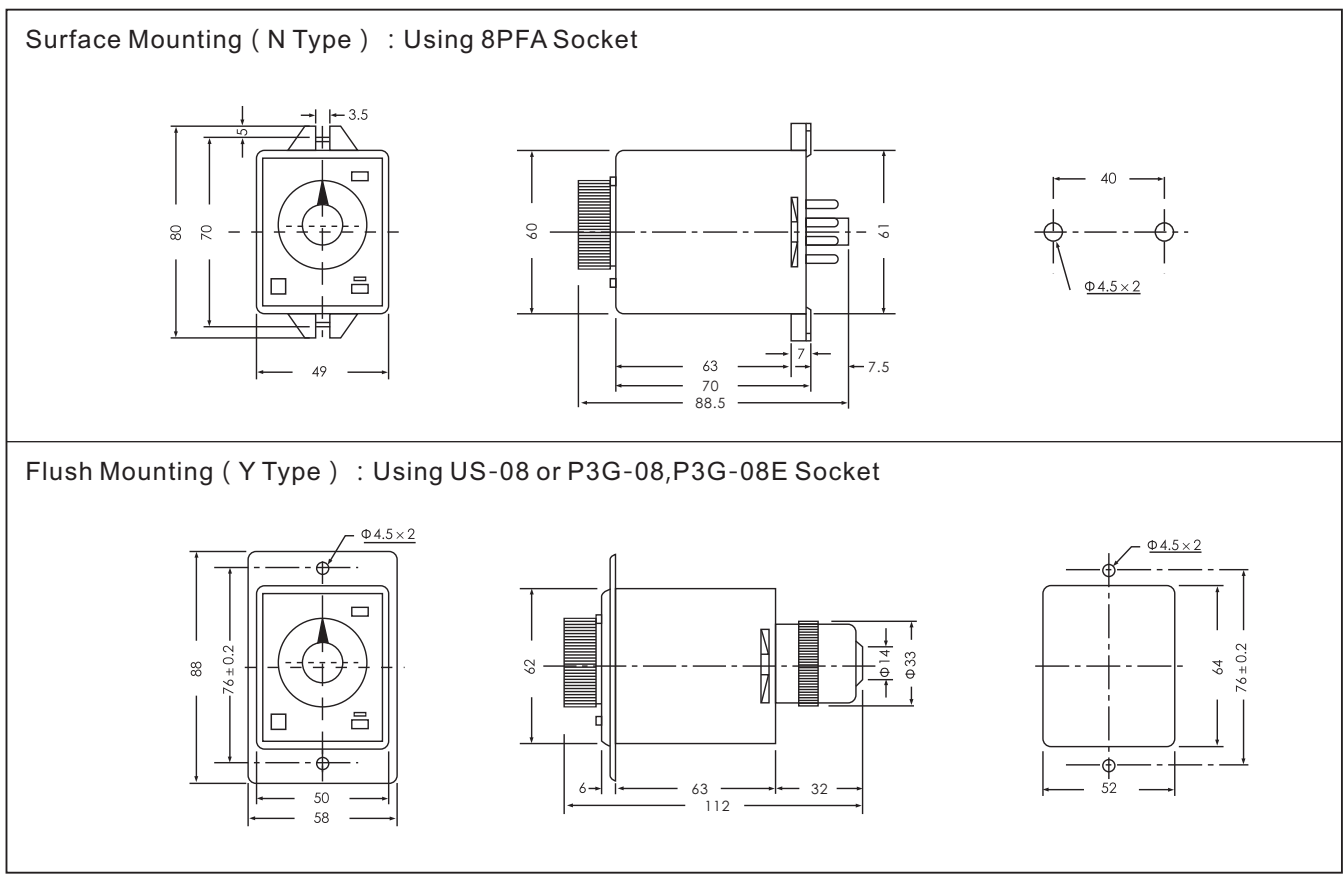

ANV ELECTRIC CO., LTD.

<p>Kaohsiung Headquarter No. 151, Jin Shan Road, Kaohsiung, Taiwan Tel :+886 7 359 5833 Fax :+886 7 359 5822 E-Mail : anv@anv.com.tw</p>	<p>Tainan Office No. 60, Lin Sen Road Sec. 1, Tainan, Taiwan Tel:+886 6 216 0988 Fax:+886 6 216 0388 E-Mail : tainan@anv.com.tw</p>	<p>Taichung Office No. 532, Wen Hsin Road Sec. 1, Taichung, Taiwan Tel :+886 4 2320 9930 Fax :+886 4 2320 9960 E-Mail : taichung@anv.com.tw</p>
<p>Taipei Office No. 166, Fu Xing 3rd Street, Taishan Dist., New Taipei City, Taiwan Tel :+886 2 2296 3133 Fax :+886 2 2296 3233 E-Mail : taipei@anv.com.tw</p>	<p>ANV ELECTRIC (HK) LTD Flat 4, 14/F., Block 4, Wai Wah Centre, Shatin, N.T., Hong Kong Tel :+852 2690 2588 Fax :+852 2690 2511 E-Mail : anv@anv.com.hk</p>	<p>ANV ELECTRIC (M) SDN. BHD 25-1, Jalan 1/116B, Kuchai Entrepreneur's Park, Off Jalan Kuchai Lama, 58200 Kuala Lumpur, Malaysia Tel :+60 3 7980 3328 Fax :+60 3 7980 3779 E-Mail : anv@anv.com.my</p>