


H2D, H3D, H4D


- 2, 3, 4 digits display with 7 segment LED display
- Offered in a wide range of AC/DC 12~60V or AC100~240V
- 22 time ranges 9.9sec~99hrs (H2D), 9.99sec~999hrs (H3D), 99.99sec~9999hrs (H4D)
- Output contact 2C delay or 1C delay with 1C instantaneous can select by pushing "MODE" switch to A or B
- Timing mode Up count or Down count (Y) option by user
- Memory function available (M)

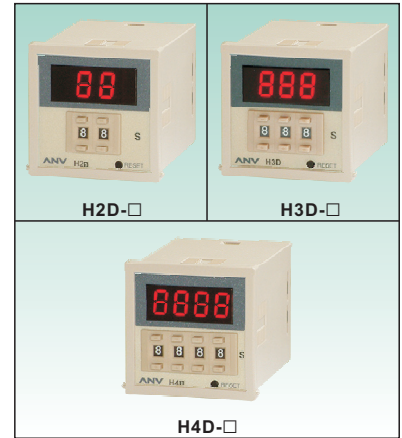


SPECIFICATIONS

MODEL	H2D	H3D	H4D
RATED VOLTAGE	12 ~ 60VDC/AC 50/60Hz 100 ~ 240VAC 50/60Hz		
OPERATING VOLTAGE	85 ~ 110% of rated voltage		
FULL TIME RANGE	SEC: 9.9, 99 MIN: 9.9, 99 H R: 9.9, 99	SEC: 9.99, 99.9, 999 MIN: 99.9, 999 H R: 99.9, 999	SEC: 99.99, 999.9, 9999 MIN: 99M59S, 999.9, 9999 H R: 99H59M, 999.9, 9999
COUNT DOWN	H2D-Y H3D-Y H4D-Y	H2D-MY H3D-MY H4D-MY	H2D-XY H3D-XY H4D-XY
SELF-RESET 0.5sec or 1.0sec	H2D-S H3D-S H4D-S	H2D-MS H3D-MS H4D-MS	H2D-XMS H3D-XMS H4D-XMS
FLICKER RELAY	H2D-R H3D-R H4D-R	H2D-MR H3D-MR H4D-MR	H2D-XR H3D-XR H4D-XR
MEMORY FUNCTION	---	○	---
CONTROL OUTPUT	Mode A/B 2C or 1A1C 5A 250VAC Resistive Load		Time limit 1C 5A 250VAC Resistive Load 1+4 GATE 1+3 RESET
L I F E	MECHANICAL	5×10^6 times	
	ELECTRICAL	10^5 times	
RESET TIME	Power Reset : 0.3sec External Reset : 0.02sec		
CONSUMED POWER	Max. 3VA		Max. 2VA
AMBIENT TEMPERATURE	-10°C ~ + 55°C		
AMBIENT HUMIDITY	45 ~ 85%RH		
WEIGHT	Approx. 130g	Approx. 130g	Approx. 120g

CONNECTION DIAGRAMS & TIMING CHARTS

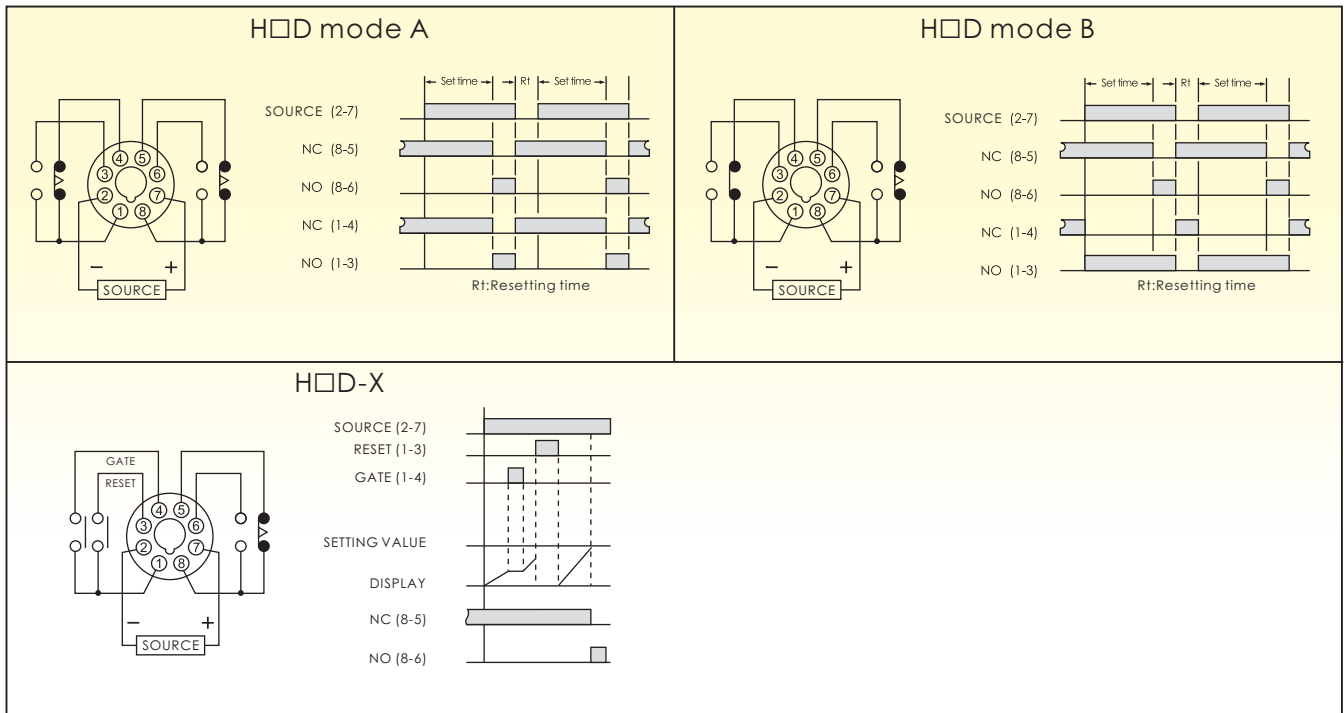

DIMENSIONS

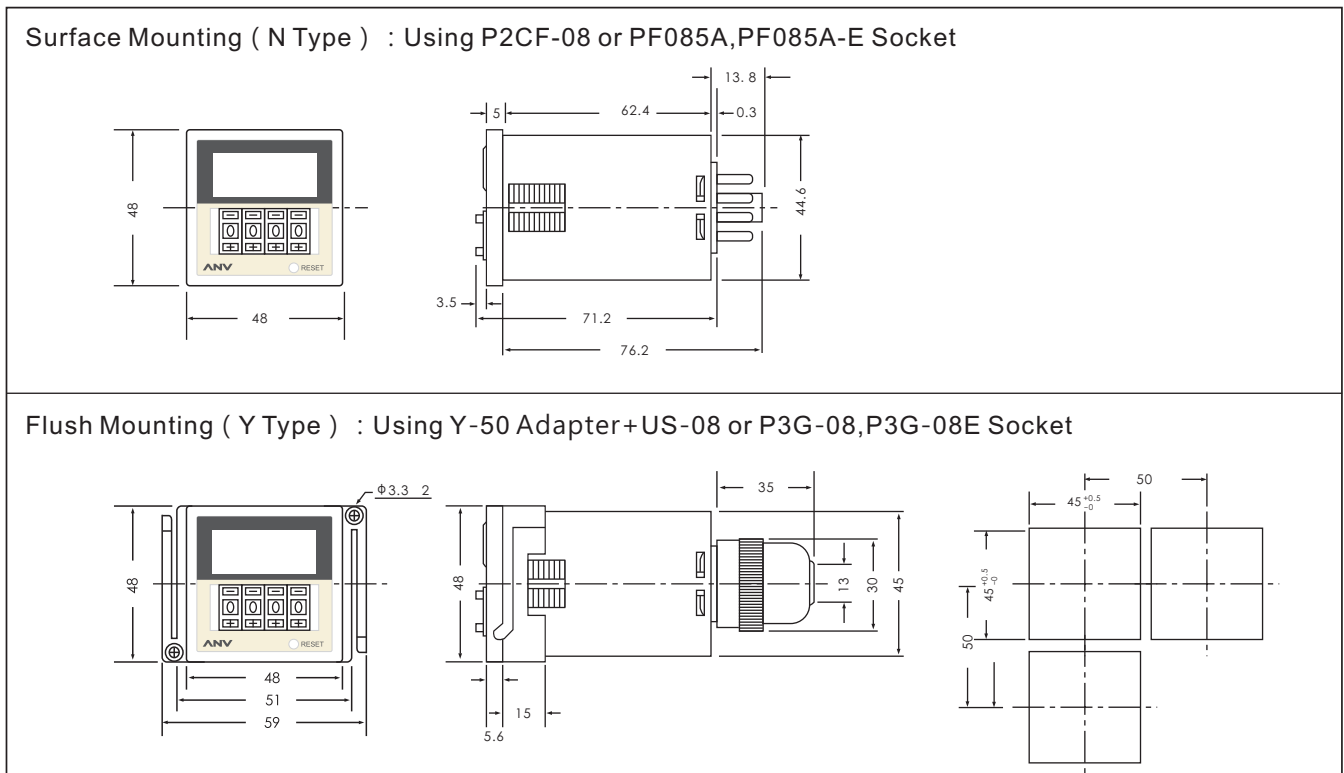

ANV ELECTRIC CO., LTD.

<p>Kaohsiung Headquarter No. 151, Jin Shan Road, Kaohsiung, Taiwan Tel :+886 7 359 5833 Fax :+886 7 359 5822 E-Mail : anv@anv.com.tw</p>	<p>Tainan Office No. 60, Lin Sen Road Sec. 1, Tainan, Taiwan Tel:+886 6 216 0988 Fax:+886 6 216 0388 E-Mail : tainan@anv.com.tw</p>	<p>Taichung Office No. 532, Wen Hsin Road Sec. 1, Taichung, Taiwan Tel :+886 4 2320 9930 Fax :+886 4 2320 9960 E-Mail : taichung@anv.com.tw</p>
<p>Taipei Office No. 166, Fu Xing 3rd Street, Taishan Dist., New Taipei City, Taiwan Tel :+886 2 2296 3133 Fax :+886 2 2296 3233 E-Mail : taipei@anv.com.tw</p>	<p>ANV ELECTRIC (HK) LTD Flat 4, 14/F., Block 4, Wai Wah Centre, Shatin, N.T., Hong Kong Tel :+852 2690 2588 Fax :+852 2690 2511 E-Mail : anv@anv.com.hk</p>	<p>ANV ELECTRIC (M) SDN. BHD 25-1, Jalan 1/116B, Kuchai Entrepreneur's Park, Off Jalan Kuchai Lama, 58200 Kuala Lumpur, Malaysia Tel :+60 3 7980 3328 Fax :+60 3 7980 3779 E-Mail : anv@anv.com.my</p>