




- Scanning speed ranges from 1~600 rpm
- Excessive (FOR) or Insufficient (REV) speeds can select by slide switch
- Abnormality and fault detection for pumps, clutches, transmissions, conveyer belts and motors
- DC 12V supplied for proximity switch or photoelectric switch
- Proximity switch type NPN or PNP can select by slide switch
- Effective fault detections and preventions


SPECIFICATIONS

FULL TIME RANGE (SPEED RANGE)		1S (60~600 RPM) 10S (6~60 RPM) 30S (3~30 RPM) 60S (1~6 RPM)	
RATED VOLTAGE		AC(V): 110, 220, 240, 380, 415, 440 50/60Hz	
INDICATOR OPERATING		ON-UP Two indicator lamp	
o/p C O N T A C T	MODEL	ADM-N	AMD-Y
	TIME LIMIT 1C	5A 250VAC Resistive Load	5A 250VAC Resistive Load
	TIME LIMIT 2C		
	INSTANTANEOUS 1C		
L I F E	MECHANICAL	5 10 ⁶ times	
	ELECTRICAL	10 ⁵ times	
RESET TIME		0.1 sec max	
CONSUMED POWER		3VA	
AMBIENT TEMPERATURE		-10°C~+55°C	
AMBIENT HUMIDITY		45~85%RH	
WEIGHT		Approx. 180g	Approx. 200g

CONNECTION DIAGRAMS & TIMING CHARTS

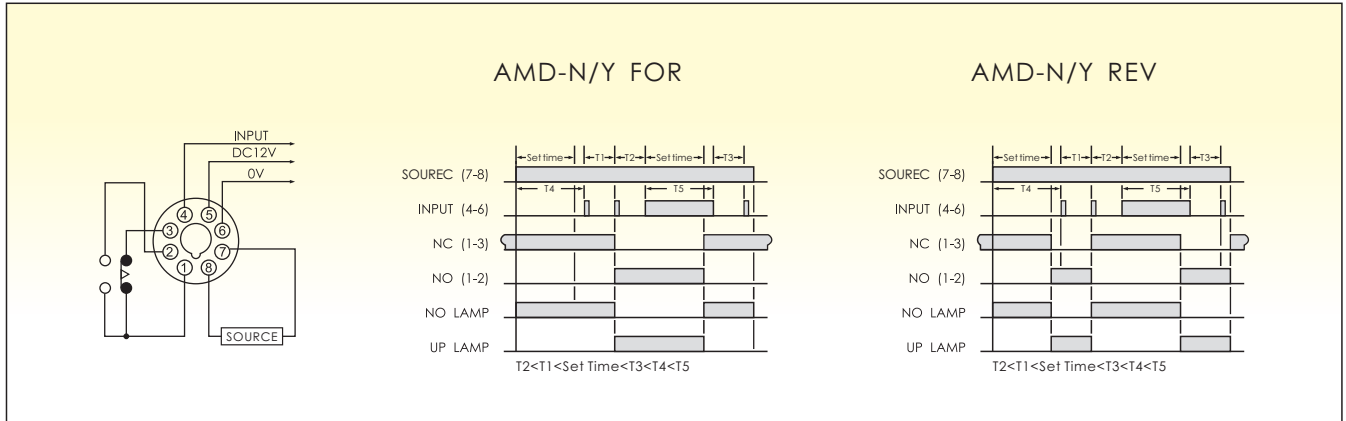

DIMENSIONS

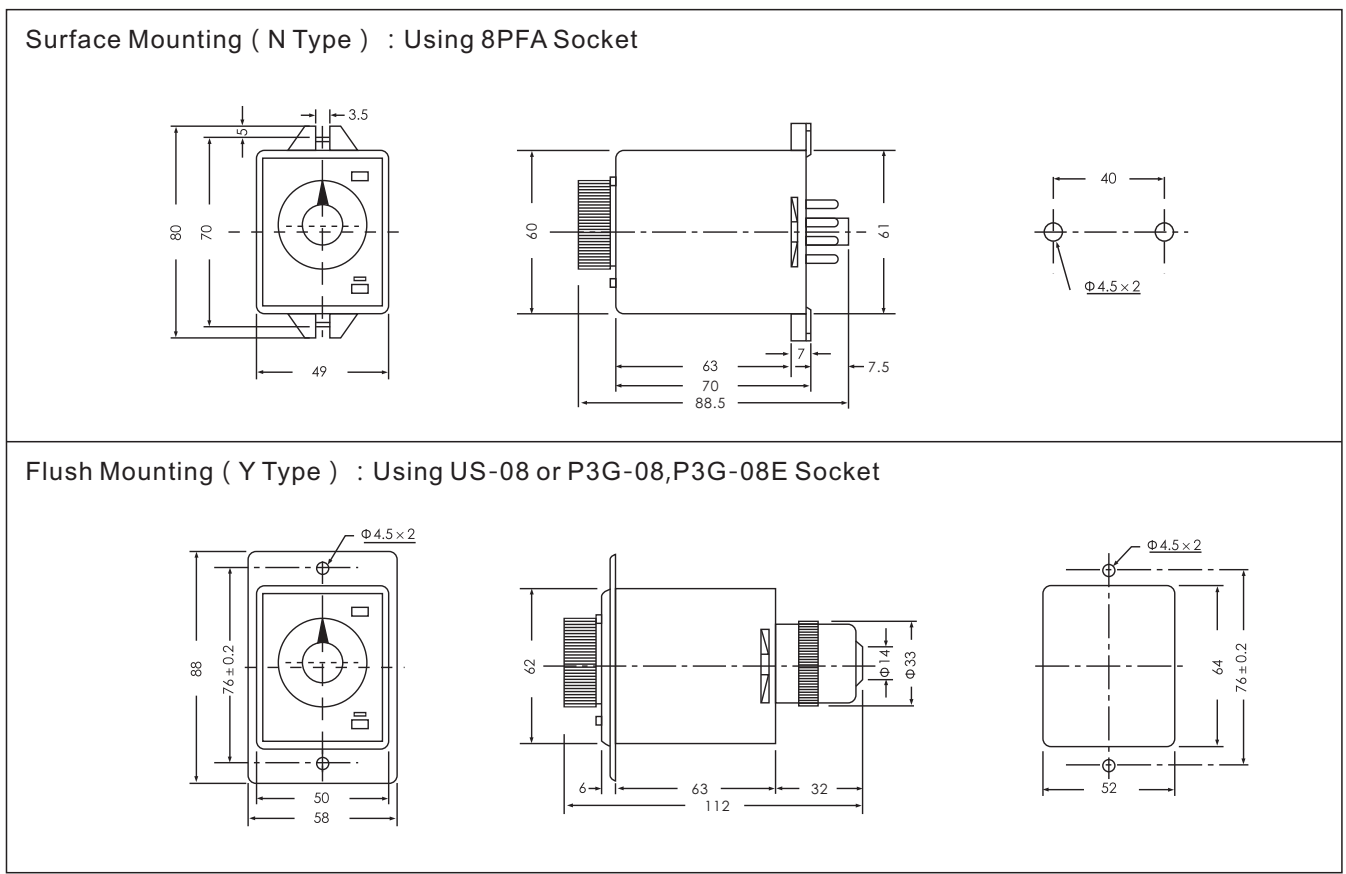

ANV ELECTRIC CO., LTD.

<p>Kaohsiung Headquarter No. 151, Jin Shan Road, Kaohsiung, Taiwan Tel :+886 7 359 5833 Fax :+886 7 359 5822 E-Mail : anv@anv.com.tw</p>	<p>Tainan Office No. 60, Lin Sen Road Sec. 1, Tainan, Taiwan Tel:+886 6 216 0988 Fax:+886 6 216 0388 E-Mail : tainan@anv.com.tw</p>	<p>Taichung Office No. 532, Wen Hsin Road Sec. 1, Taichung, Taiwan Tel :+886 4 2320 9930 Fax :+886 4 2320 9960 E-Mail : taichung@anv.com.tw</p>
<p>Taipei Office No. 166, Fu Xing 3rd Street, Taishan Dist., New Taipei City, Taiwan Tel :+886 2 2296 3133 Fax :+886 2 2296 3233 E-Mail : taipei@anv.com.tw</p>	<p>ANV ELECTRIC (HK) LTD Flat 4, 14/F., Block 4, Wai Wah Centre, Shatin, N.T., Hong Kong Tel :+852 2690 2588 Fax :+852 2690 2511 E-Mail : anv@anv.com.hk</p>	<p>ANV ELECTRIC (M) SDN. BHD 25-1, Jalan 1/116B, Kuchai Entrepreneur's Park, Off Jalan Kuchai Lama, 58200 Kuala Lumpur, Malaysia Tel :+60 3 7980 3328 Fax :+60 3 7980 3779 E-Mail : anv@anv.com.my</p>