




- DIN Size 48H × 48Wmm
- Using CMOS IC, high reliability and stability
- Off delay timer with time adjustable
- Delay time ranges from 1 sec to 60 min
- External reset available (AH5F-A, AH5F-F)
- Flush mount with Type Y-50+P3G-08 and Surface mount with Type P2CF-08 Socket


SPECIFICATIONS

FULL TIME RANGE		SEC : 1, 3, 6, 10, 30, 60 MIN : 3, 6, 10, 30, 60		
RATED VOLTAGE		DC(V): 12, 24, 48, 110 AC(V): 12, 24, 48, 110, 220, 240, 380, 415, 440 50/60Hz		
INDICATOR OPERATING		Power On Indicator		
o/p C O N T A C T	MODE	AH5F-A	AH5F-B	AH5F-F
	TIME LIMIT 1C	5A 250VAC Resistive Load		5A 250VAC Resistive Load
	TIME LIMIT 2C		5A 250VAC Resistive Load	
	INSTANTANEOUS 1C			
L I F E	MECHANICAL	5×10 ⁶ times		
	ELECTRICAL	10 ⁵ times		
RESET TIME		0.1 sec max		
CONSUMED POWER		3VA		
AMBIENT TEMPERATURE		-10°C~+55°C		
AMBIENT HUMIDITY		45~85%RH		
WEIGHT		Approx. 170g		

CONNECTION DIAGRAMS & TIMING CHARTS

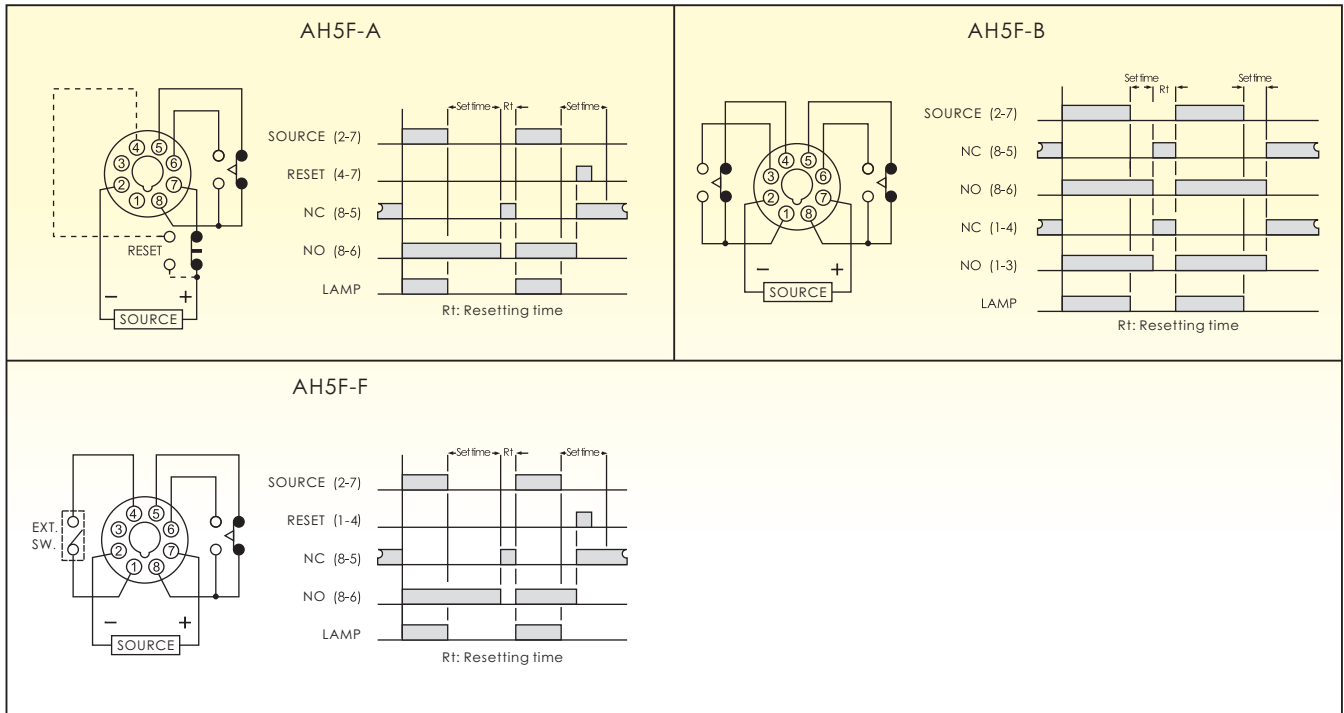

DIMENSIONS

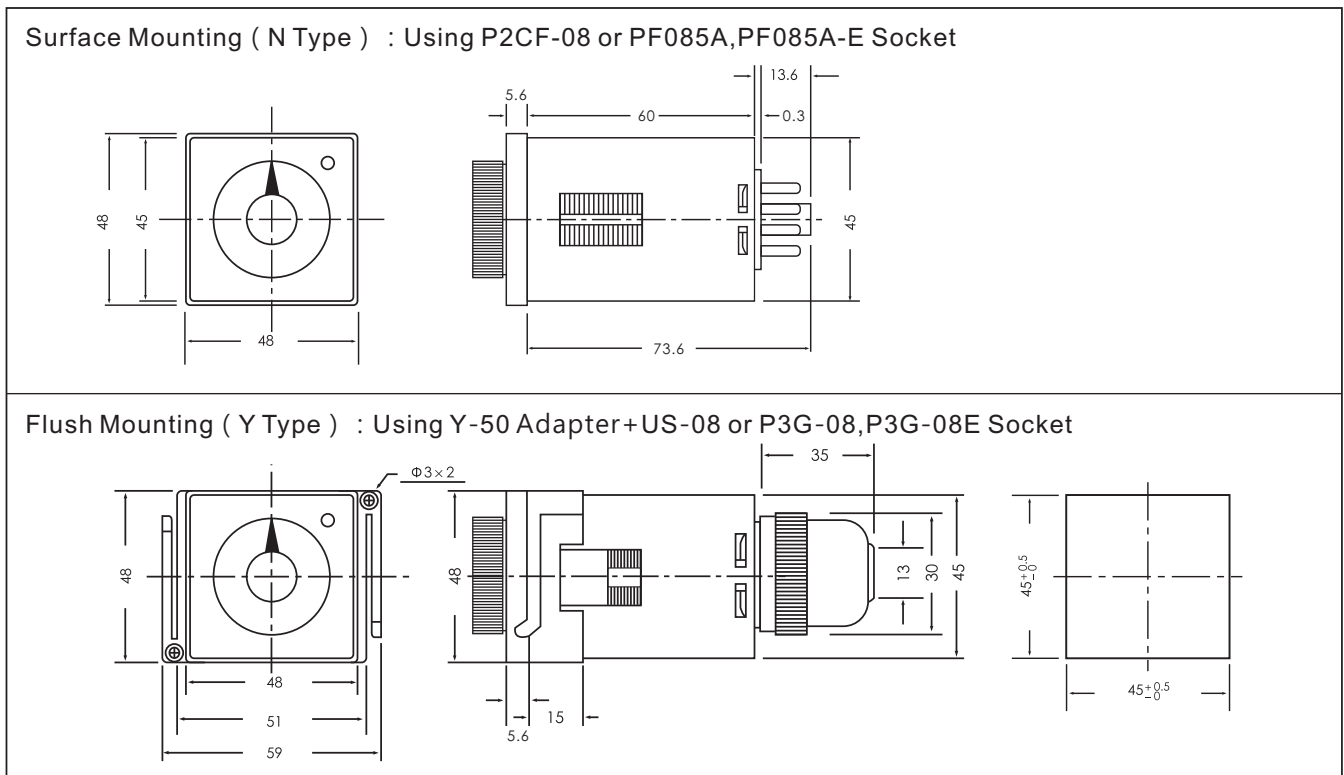

ANV ANV ANV ELECTRIC CO., LTD.

Kaohsiung Headquarter

No. 151, Jin Shan Road, Kaohsiung, Taiwan
 Tel :+886 7 359 5833 Fax :+886 7 359 5822
 E-Mail : anv@anv.com.tw

Taipei Office

No. 166, Fu Xing 3rd Street, Taishan Dist.,
 New Taipei City, Taiwan
 Tel :+886 2 2296 3133 Fax :+886 2 2296 3233
 E-Mail : taipei@anv.com.tw

Tainan Office

No. 60, Lin Sen Road Sec. 1, Tainan, Taiwan
 Tel:+886 6 216 0988 Fax:+886 6 216 0388
 E-Mail : tainan@anv.com.tw

ANV ELECTRIC (HK) LTD

Flat 4, 14/F., Block 4, Wai Wah Centre,
 Shatin, N.T., Hong Kong
 Tel :+852 2690 2588 Fax :+852 2690 2511
 E-Mail : anv@anv.com.hk

Taichung Office

No. 532, Wen Hsin Road Sec. 1, Taichung, Taiwan
 Tel :+886 4 2320 9930 Fax :+886 4 2320 9960
 E-Mail : taichung@anv.com.tw

ANV ELECTRIC (M) SDN. BHD

25-1, Jalan 1/116B, Kuchai Entrepreneur's Park,
 Off Jalan Kuchai Lama, 58200 Kuala Lumpur, Malaysia
 Tel :+60 3 7980 3328 Fax :+60 3 7980 3779
 E-Mail : anv@anv.com.my