


## CV2M, CV3M


- 2,3 digits display with 7 segment LED display
- Offered in a wide range of AC/DC 12~60V or AC100~240V
- ON-OFF timing adjustable individually repeat operation with 8 time ranges 0.01sec~990hrs (CV2M), 0.01sec~9990hrs (CV3M)
- Timing mode Up count or Down count (Y) option by user
- Output contact 2C delay or 1C delay with 1C instantaneous can select by pushing "MODE" switch to A or B
- Memory function available (M)

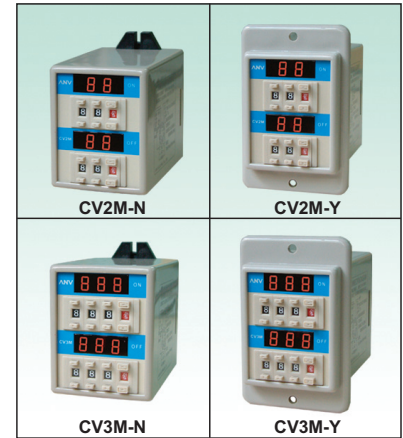

## SPECIFICATIONS


MODEL	CV2M		CV3M	
RATED VOLTAGE	12 ~ 60VDC/AC 100 ~ 240VAC 50/60Hz			
OPERATING VOLTAGE	85 ~ 110% of rated voltage			
ON-OFF FULL TIME RANGE	SEC: 0.99, 9.9, 99 MIN: 9.9, 99 H R: 9.9, 99, 990		SEC: 9.99, 99.9, 999 MIN: 99.9, 999 H R: 99.9, 999, 9990	
COUNT DOWN(Y)	CV2M-NY CV2M-YY	CV2M-NMY CV2M-YMY	CV3M-NY CV3M-YY	CV3M-NMY CV3M-YMY
SINGLE ACTING(T)	CV2M-NT CV2M-YT	CV2M-NMT CV2M-YMT	CV3M-NT CV3M-YT	CV3M-NMT CV3M-YMT
REVERSE ACTING(K)	CV2M-NK CV2M-YK	CV2M-NMK CV2M-YMK	CV3M-NK CV3M-YK	CV3M-NMK CV3M-YMK
MEMORY FUNCTION	---	○	---	○
CONTROL OUTPUT	Mode A/B 2C or 1A1C 5A 250VAC Resistive Load			
L I F E	MECHANICAL	$5 \times 10^6$ times		
	ELECTRICAL	$10^5$ times		
RESET TIME	Power Reset : 0.3sec External Reset : 0.02sec			
CONSUMED POWER	Max. 3VA			
AMBIENT TEMPERATURE	-10°C ~ + 55°C			
AMBIENT HUMIDITY	45 ~ 85%RH			
WEIGHT	Approx. 250g			

CONNECTION DIAGRAMS & TIMING CHARTS

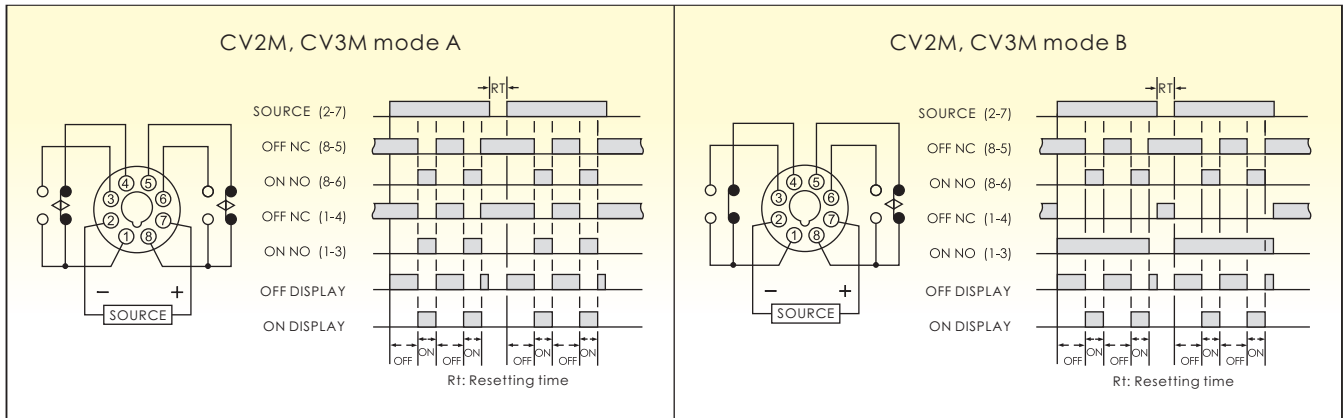


DIMENSIONS

Surface Mounting ( N Type ) : Using 8PFA Socket

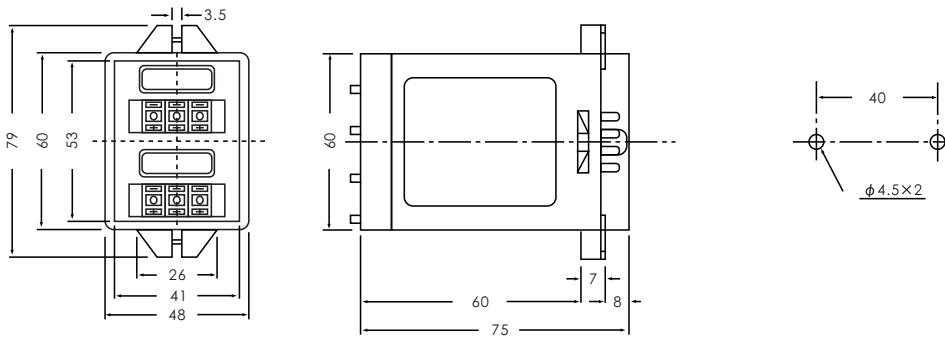

Flush Mounting ( Y Type ) : Using US-08 or P3G-08,P3G-08E Socket

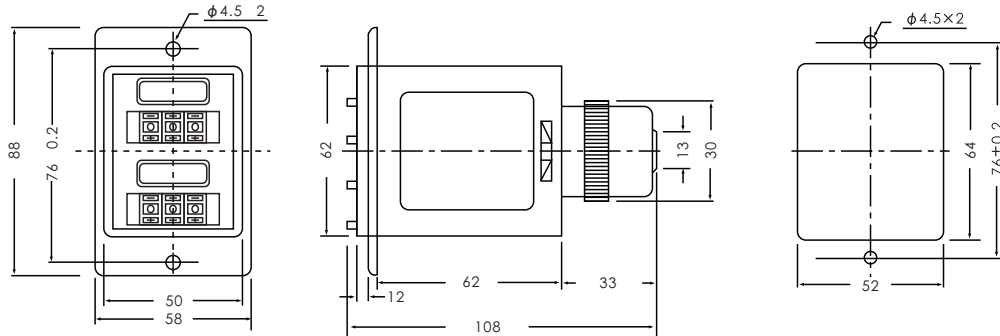

ANV ELECTRIC CO., LTD.

**Kaohsiung Headquarter**

No. 151, Jin Shan Road, Kaohsiung, Taiwan  
 Tel :+886 7 359 5833 Fax :+886 7 359 5822  
 E-Mail : anv@anv.com.tw

**Taipei Office**

No. 166, Fu Xing 3rd Street, Taishan Dist.,  
 New Taipei City, Taiwan  
 Tel :+886 2 2296 3133 Fax :+886 2 2296 3233  
 E-Mail : taipei@anv.com.tw

**Tainan Office**

No. 60, Lin Sen Road Sec. 1, Tainan, Taiwan  
 Tel:+886 6 216 0988 Fax:+886 6 216 0388  
 E-Mail : tainan@anv.com.tw

**ANV ELECTRIC (HK) LTD**

Flat 4, 14/F., Block 4, Wai Wah Centre,  
 Shatin, N.T., Hong Kong  
 Tel :+852 2690 2588 Fax :+852 2690 2511  
 E-Mail : anv@anv.com.hk

**Taichung Office**

No. 532, Wen Hsin Road Sec. 1, Taichung, Taiwan  
 Tel :+886 4 2320 9930 Fax :+886 4 2320 9960  
 E-Mail : taichung@anv.com.tw

**ANV ELECTRIC (M) SDN. BHD**

25-1, Jalan 1/116B, Kuchai Entrepreneur's Park,  
 Off Jalan Kuchai Lama, 58200 Kuala Lumpur, Malaysia  
 Tel :+60 3 7980 3328 Fax :+60 3 7980 3779  
 E-Mail : anv@anv.com.my