

H7E

DIN Size W48 × H24mm


- 3 input type: No-voltage (contact, transistor), DC 5~24V, AC/DC 24~240V
- H7E-C□ is a 8-digit total counter
- H7E-C□ can select 30Hz or 1KHz speed by DIP switch
- H7E-CNVF can replace electro-magnetic counter
- H7E-T□ is a 7-digit time counter
- H7E-TN time range: 999999.9h/3999d23.9h
- H7E-TN1 time range: 999h59m59s/9999h59.9m




SPECIFICATIONS

DIMENSIONS (mm)	Flush : 24H×48W×49.5D					
MOUNTING & SOCKET	Flush : Y92F-75 or Y92F-76 or Y92F-77					
DISPLAY TIME	7-segment LCD without backlight, zero suppression					
RESET METHOD	External reset, Manual reset					
FUNCTION	8 Digit total counter					
COUNT INPUT	H7E-CN	H7E-CNV		H7E-CNVF		
	No-voltage (Contact, Transistor)	DC 5~24V		AC/DC 24~240V 50/60Hz		
RESET INPUT	No-voltage (Contact, Transistor)	DC 5~24V		No-voltage (Contact, Transistor)		
COUNT METHOD	Count UP					
MAX. COUNTING SPEED	30Hz / 1KHz (switchable)					
FUNCTION	7 Digit time counter					
TIMER INPUT	H7E-TN	H7E-TNV	H7E-TNFV	H7E-TN1	H7E-TNV1	H7E-TNFV1
	No-voltage (Contact, Transistor)	DC 5~24V	AC/DC 24~240V 50/60Hz	No-voltage (Contact, Transistor)	DC 5~24V	AC/DC 24~240V 50/60Hz
RESET INPUT	No-voltage (Contact, Transistor)	DC 5~24V	No-voltage (Contact, Transistor)	No-voltage (Contact, Transistor)	DC 5~24V	No-voltage (Contact, Transistor)
TIME RANGE	999999.9h/3999d23.9h			999h59m59s/9999h59.9m		
BATTERY LIFE	7 Years Min.					
AMBIENT TEMPERATURE	-10℃~+55℃					
AMBIENT HUMIDITY	45~85%RH					
WEIGHT	Approx.65g					


CONNECTION DIAGRAMS

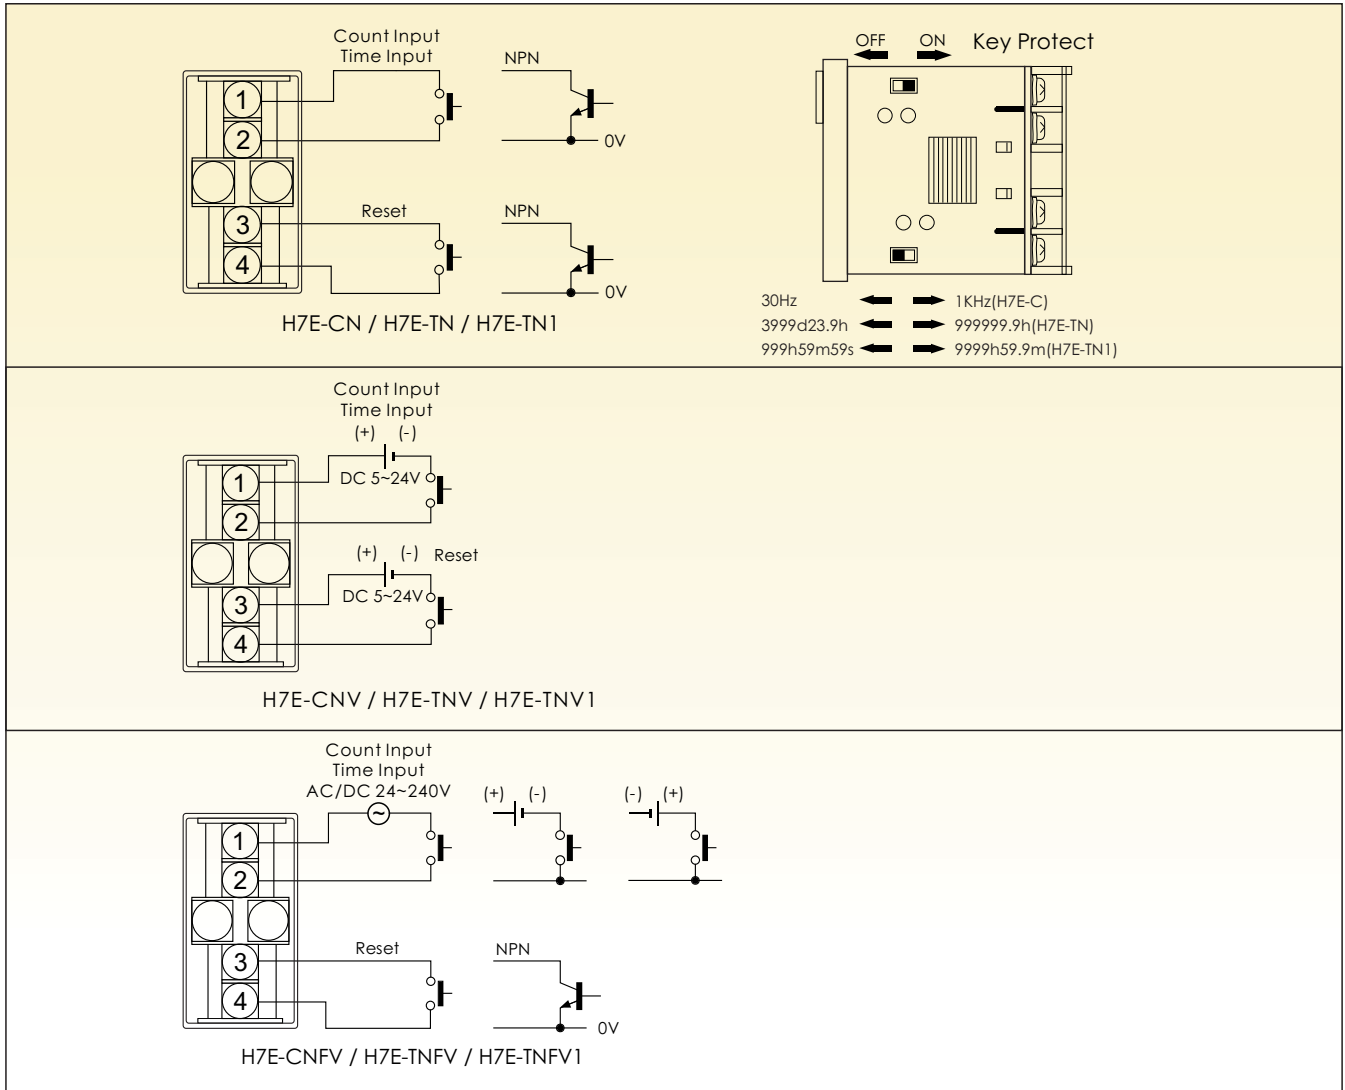


TIMING CHARTS

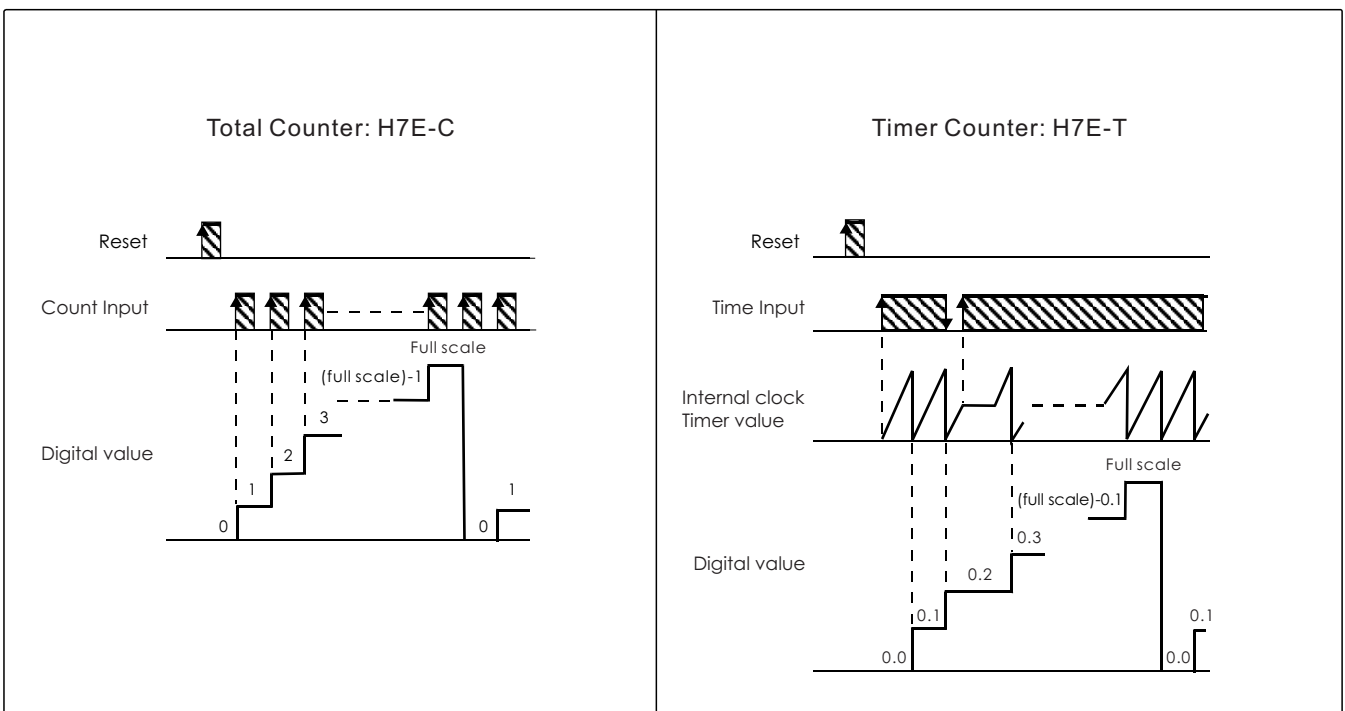

DIMENSIONS

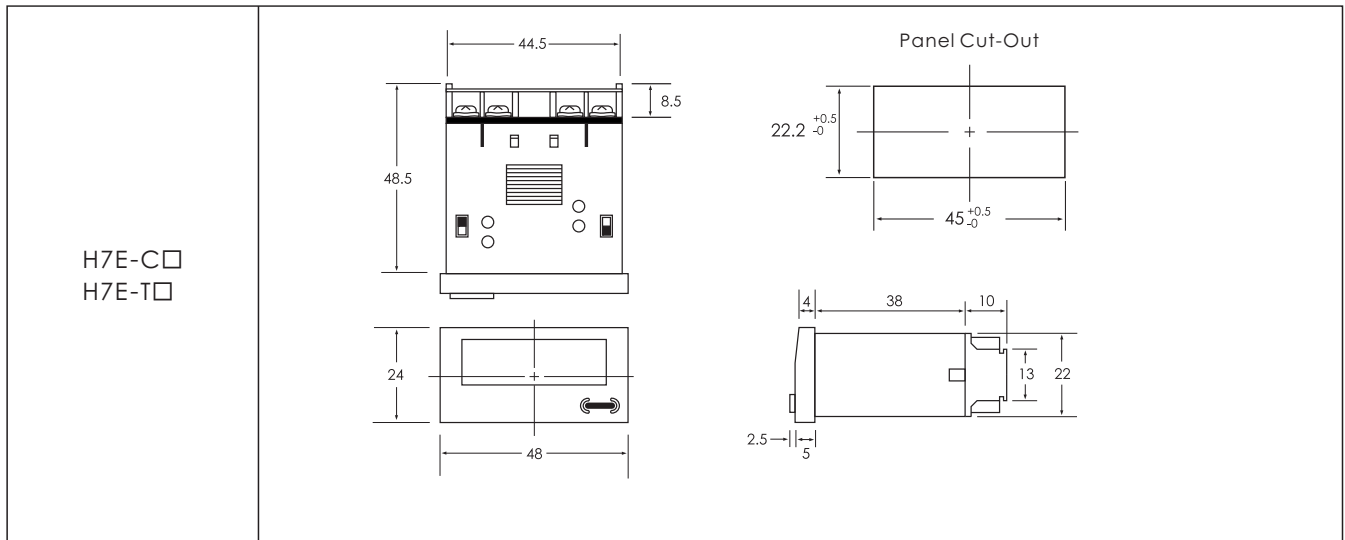

ADAPTER

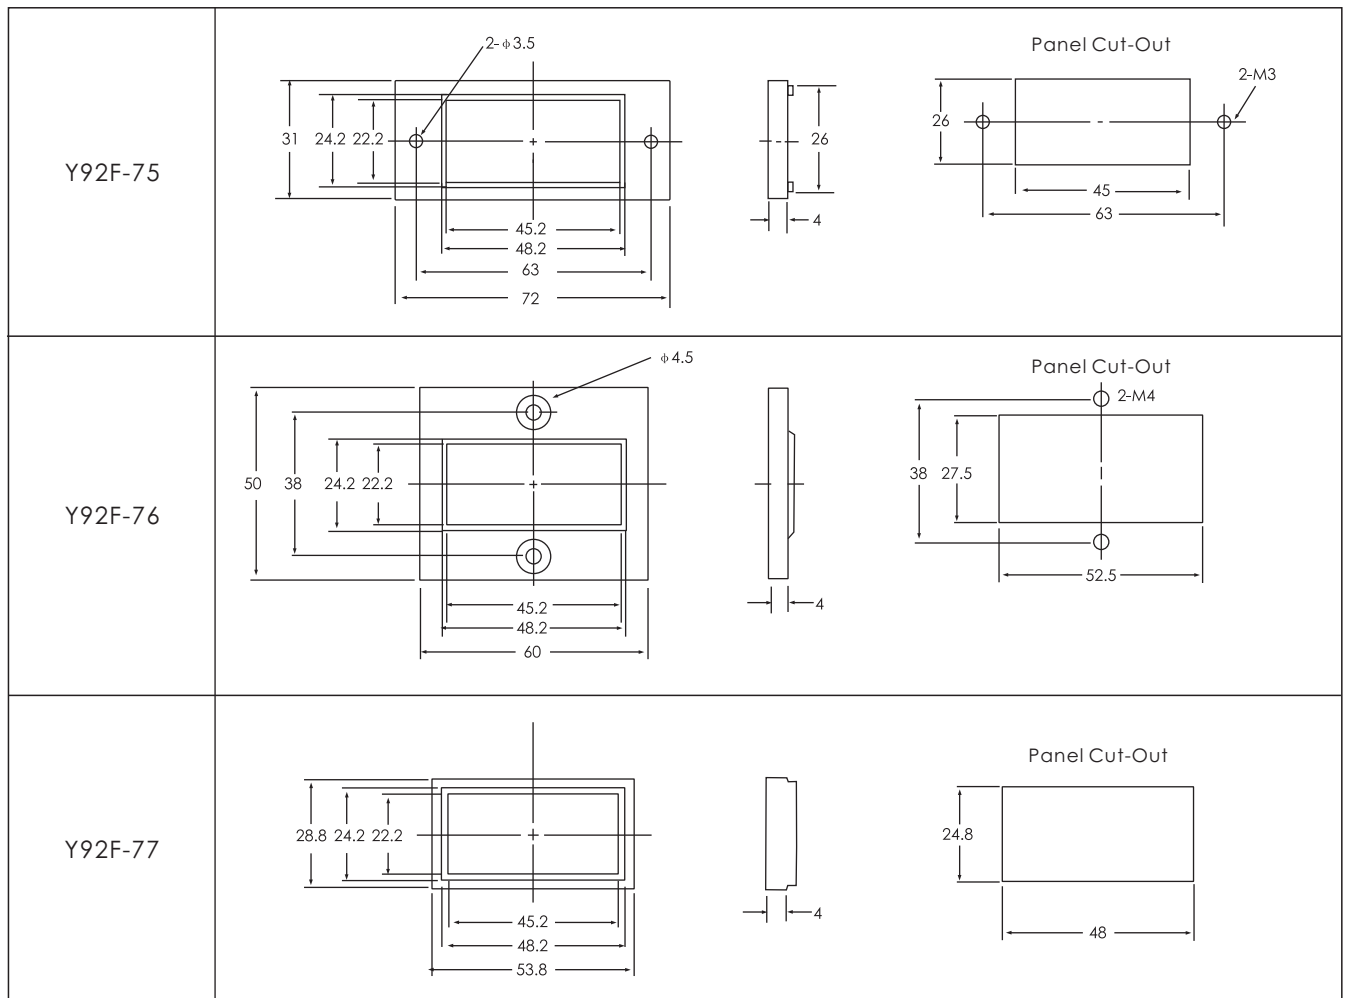

Kaohsiung Headquarter

No. 151, Jin Shan Road, Kaohsiung, Taiwan
Tel :+886 7 359 5833 Fax :+886 7 359 5822
E-Mail : anv@anv.com.tw

Taipei Office

No. 166, Fu Xing 3rd Street, Taishan Dist.,
New Taipei City, Taiwan
Tel :+886 2 2296 3133 Fax :+886 2 2296 3233
E-Mail : taipei@anv.com.tw

Tainan Office

No. 60, Lin Sen Road Sec. 1, Tainan, Taiwan
Tel:+886 6 216 0988 Fax:+886 6 216 0388
E-Mail : tainan@anv.com.tw

ANV ELECTRIC (HK) LTD

Flat 4, 14/F., Block 4, Wai Wah Centre,
Shatin, N.T., Hong Kong
Tel :+852 2690 2588 Fax :+852 2690 2511
E-Mail : anv@anv.com.hk

Taichung Office

No. 532, Wen Hsin Road Sec. 1, Taichung, Taiwan
Tel :+886 4 2320 9930 Fax :+886 4 2320 9960
E-Mail : taichung@anv.com.tw

ANV ELECTRIC (M) SDN. BHD

25-1, Jalan 1/116B, Kuchai Entrepreneur's Park,
Off Jalan Kuchai Lama, 58200 Kuala Lumpur, Malaysia
Tel :+60 3 7980 3328 Fax :+60 3 7980 3779
E-Mail : anv@anv.com.my