

T2D-□T, T3D-□T


- 2, 3 digits display with 7 segment LED display
- Offered in a wide range of AC/DC 12~60V or AC100~240V
- 8 time ranges 0.01sec~990hrs (T2D-T), 0.01sec~9990hrs (T3D-T)
- Output contact 2C delay or 1C delay with 1C instantaneous can select by pushing "MODE" switch to A or B
- Timing mode Up count or Down count (Y) option by user
- Memory function available (M)




SPECIFICATIONS

MODEL	T2D-□T		T3D-□T	
RATED VOLTAGE	12 ~ 60VDC/AC 50/60Hz 100 ~ 240VAC 50/60Hz			
OPERATING VOLTAGE	85 ~ 110% of rated voltage			
FULL TIME RANGE	SEC: 0.99, 9.9, 99 MIN: 9.9, 99 H R: 9.9, 99, 990		SEC: 9.99, 99.9, 999 MIN: 99.9, 999 H R: 99.9, 999, 9990	
COUNT DOWN	T2D-NTY, T2D-YTY T3D-NTY, T3D-YTY	T2D-NTMY, T2D-YTMY T3D-NTMY, T3D-YTMY	T2D-NTXY, T2D-YTXY T3D-NTXY, T3D-YTXY	T2D-NTXMY, T2D-YTXMY T3D-NTXMY, T3D-YTXMY
SELF-RESET 0.5sec or 1.0sec	T2D-NTS, T2D-YTS T3D-NTS, T3D-YTS	T2D-NTMS, T2D-YTMS T3D-NTMS, T3D-YTMS	T2D-NTXS, T2D-YTXS T3D-NTXS, T3D-YTXS	T2D-NTXMS, T2D-YTXMS T3D-NTXMS, T3D-YTXMS
FLICKER RELAY	T2D-NTR, T2D-YTR T3D-NTR, T3D-YTR	T2D-NTMR, T2D-YTMR T3D-NTMR, T3D-YTMR	T2D-NTXR, T2D-YTXR T3D-NTXR, T3D-YTXR	T2D-NTXMR, T2D-YTXMR T3D-NTXMR, T3D-YTXMR
MEMORY FUNCTION	---	○	---	○
CONTROL OUTPUT	Mode A/B 2C or 1A1C 5A 250VAC Resistive Load		Time limit 1C 5A 250VAC Resistive Load 1+4 GATE 1+3 RESET	
L I F E	MECHANICAL	5×10^6 times		
	ELECTRICAL	10^5 times		
RESET TIME	Power Reset : 0.3sec External Reset : 0.02sec			
CONSUMED POWER	Max. 3VA		Max. 2VA	
AMBIENT TEMPERATURE	-10°C ~ + 55°C			
AMBIENT HUMIDITY	45 ~ 85%RH			
WEIGHT	Approx. 180g	Approx. 180g	Approx. 170g	Approx. 170g

CONNECTION DIAGRAMS & TIMING CHARTS

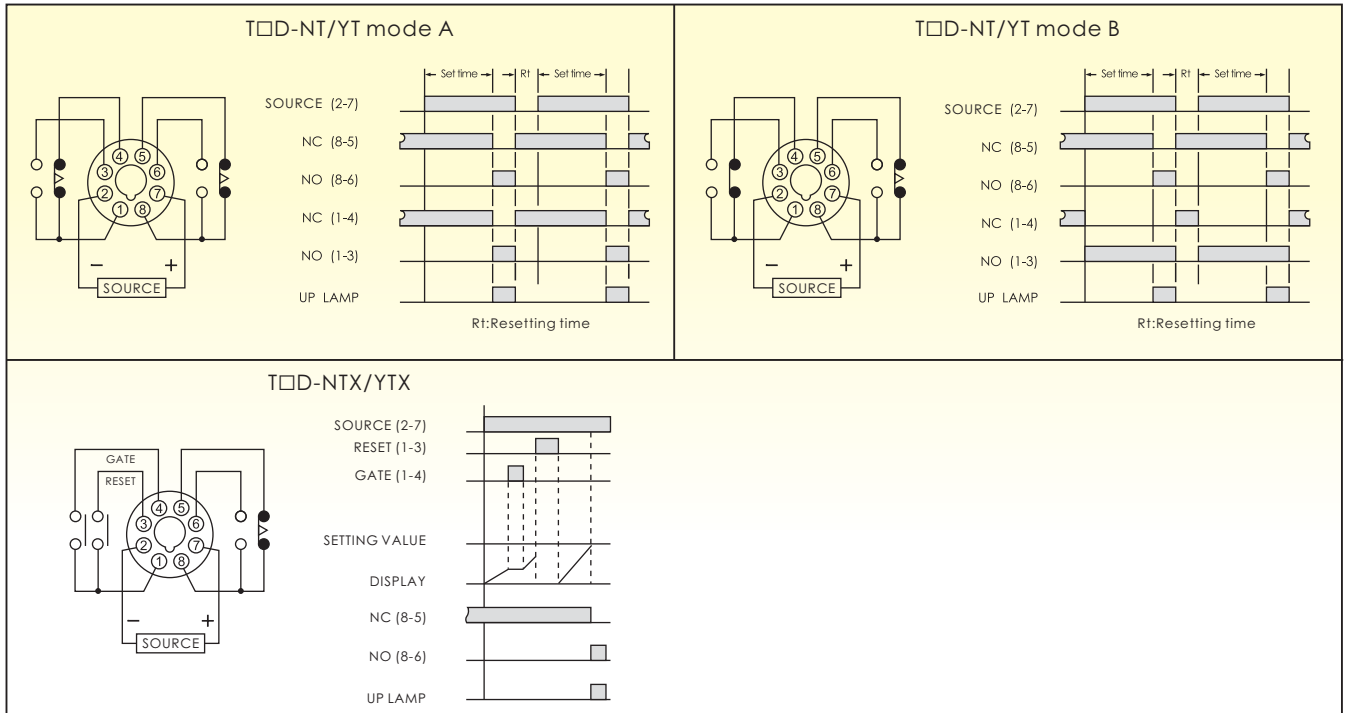

DIMENSIONS

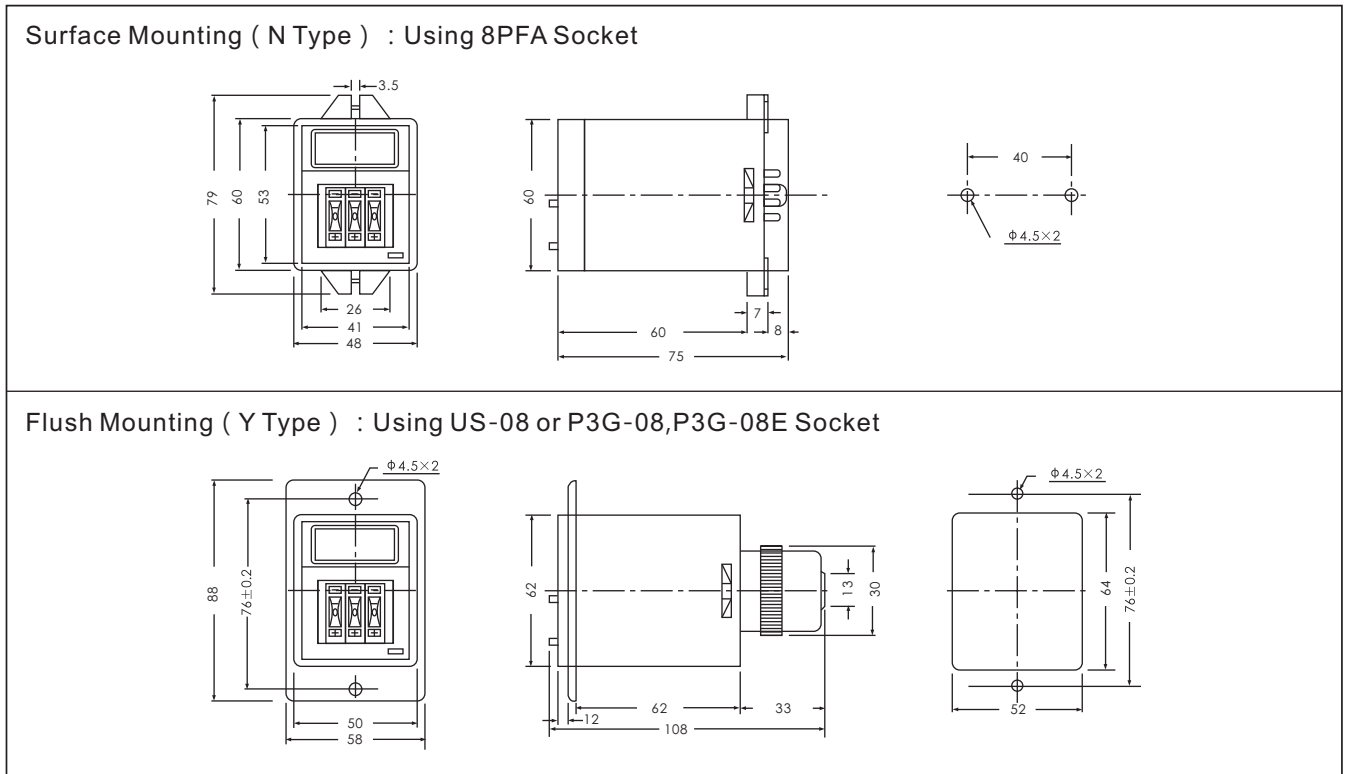

ANV ANV ANV ELECTRIC CO., LTD.

Kaohsiung Headquarter

No. 151, Jin Shan Road, Kaohsiung, Taiwan
 Tel :+886 7 359 5833 Fax :+886 7 359 5822
 E-Mail : anv@anv.com.tw

Taipei Office

No. 166, Fu Xing 3rd Street, Taishan Dist.,
 New Taipei City, Taiwan
 Tel :+886 2 2296 3133 Fax :+886 2 2296 3233
 E-Mail : taipei@anv.com.tw

Tainan Office

No. 60, Lin Sen Road Sec. 1, Tainan, Taiwan
 Tel:+886 6 216 0988 Fax:+886 6 216 0388
 E-Mail : tainan@anv.com.tw

ANV ELECTRIC (HK) LTD

Flat 4, 14/F., Block 4, Wai Wah Centre,
 Shatin, N.T., Hong Kong
 Tel :+852 2690 2588 Fax :+852 2690 2511
 E-Mail : anv@anv.com.hk

Taichung Office

No. 532, Wen Hsin Road Sec. 1, Taichung, Taiwan
 Tel :+886 4 2320 9930 Fax :+886 4 2320 9960
 E-Mail : taichung@anv.com.tw

ANV ELECTRIC (M) SDN. BHD

25-1, Jalan 1/116B, Kuchai Entrepreneur's Park,
 Off Jalan Kuchai Lama, 58200 Kuala Lumpur, Malaysia
 Tel :+60 3 7980 3328 Fax :+60 3 7980 3779
 E-Mail : anv@anv.com.my